

Power-operated tools for RIVNUT® /PLUSNUT® fasteners


C-900 model A pneumatic-hydraulic header operating range (for heavy production)

Range: #10 thru 1/2 RIVNUTS and #10 thru 3/8 PLUSNUTS

Metric: M5 thru M12 RIVNUTS and M5 thru M10 PLUSNUTS

Air-operated hydraulic tool consisting of a hand-held header unit, a foot-operated pneumatic-hydraulic pump and a connecting high-pressure hose. Recommended operating air pressure 75-80 psi. Total weight 16 lbs.

Thread size must be specified when tool is ordered. Extra studs should be ordered with tool.

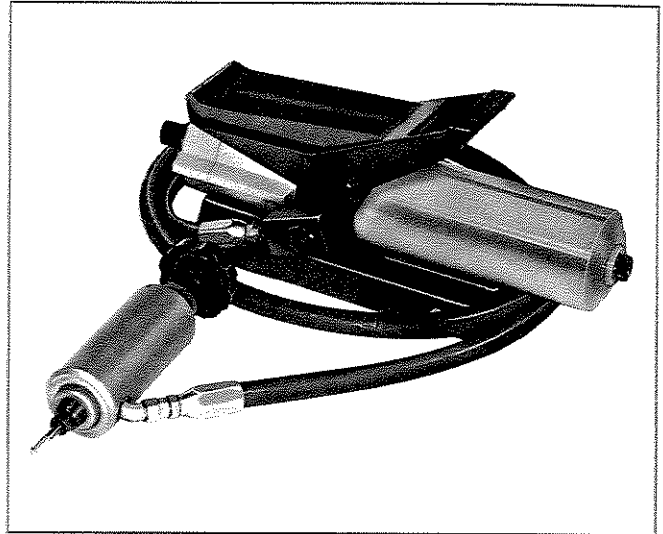

Operating range

RIVNUT Material	#4	#6	#8	#10	1/4	5/16	3/8	1/2	M3	M4	M5	M6	M7	M8	M10	M12
Aluminum																
Brass & Steel																
Stainless Steel																

Recommended

Parts required to convert tool to other thread sizes

Unified Thread System

* Standard HEX RIVNUTS Require:
60-3201-31 for 5/16 Thread Size.
60-3201-37 for 3/8 Thread Size.

Thread Size	RIVNUT Pull-Up Stud	Pull-Up Stud Holder	Anvil	PLUSNUT Pull-Up Stud
10-24	60-1000-1024	60-2500-10	60-3500-10	60-1000-1024
10-32	60-1000-1032	60-2500-10	60-3500-10	60-1000-1032
12-24	60-1203-1224	60-2500-25	60-3500-12	—
1/4-20	60-1203-2520	60-2500-25	60-3500-25	60-1000-2520
1/4-28	60-1203-2528	60-2500-25	60-3500-25	60-1000-2528
5/16-18	60-1500-3118	Not Required	* 60-3200-31	60-1500-3118
5/16-24	60-1500-3124	Not Required	* 60-3200-31	60-1500-3124
3/8-16	60-1500-3716	Not Required	* 60-3200-37	60-1500-3716
3/8-24	60-1500-3724	Not Required	* 60-3200-37	60-1500-3724
1/2-13	60-1500-5013	Not Required	60-3200-50	—
1/2-20	60-1500-5020	Not Required	60-3200-50	—

Metric Thread System

Thread Size	Pull-Up Stud	Pull-Up Stud Holder	Anvil		PLUSNUT Pull-Up Stud
			PLUSNUTS & RIVNUTS	HEX	
M5X0.8	60-1204-M5	60-2500-25	60-3500-M5	60-3201-M5	60-1005-M5
M6X1.0	60-1204-M6	60-2500-25	60-3500-M6	60-3201-M6	60-1005-M6
M7X1.0	60-1500-M7	Not Required	60-3500-M7	—	—
M8X1.25	60-1500-M8	Not Required	60-3200-M8	60-3201-M8	60-1500-M8
M10X1.50	60-1500-M10	Not Required	60-3200-M10	60-3201-M10	60-1500-M10
M12X1.75	60-1500-M12	Not Required	60-3200-M12	—	—