

4069 BLIND RIVET NUT INSTALLATION TOOL



Bollhoff has developed a new tool to make the use of blind rivet nut fasteners that much easier! The 4069 automatic reversing feature increases production rates. The pressure-controlled installation assures consistent setting and improves mandrel life.

Installs:

- Rivnut®
- Rivkle®
- ITR®

Characteristics:

- Setting Rate: 20 - 30 pieces per minute
- Weight: 4.4 pounds
- Setting Force: 3,400 pounds
- Working Pressure: 80 - 100 PSI
- Stroke: 0.28 inch
- Construction: Aluminum & Magnesium Body
- Operation: Spin-Pull-Spin
- Size: 12 1/2" (height), 12" (length)

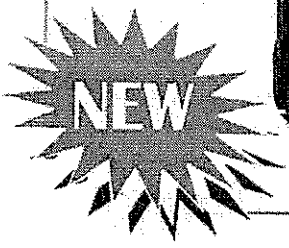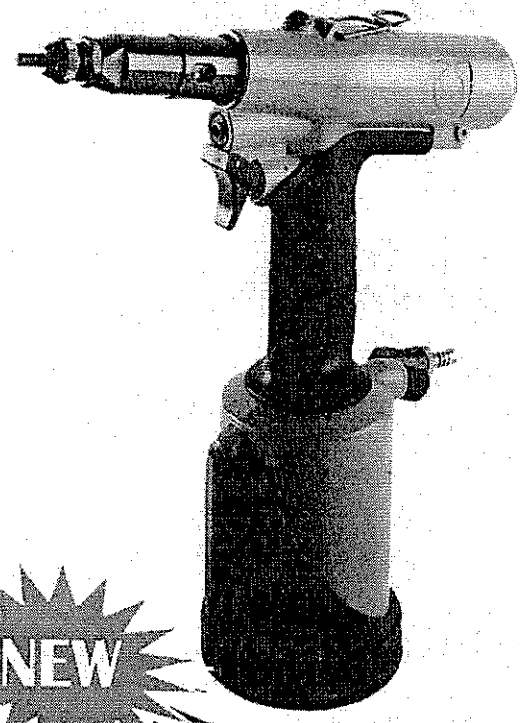

Operating Range for Rivkle® and ITR® Fasteners

Materials	M3 #6	M4 #8	M5 #10	M6 1/4"	M8 5/16"	M10 3/8"	M12 1/2"
Aluminum	✓	✓	✓	✓	✓		
Steel	✓	✓	✓	✓	✓		
Stainless Steel	✓	✓	✓	✓	✓		

Operating Range for Rivnut® Fasteners

Materials	M3 #6	M4 #8	M5 #10	M6 1/4"	M8 5/16"	M10 3/8"	M12 1/2"
Aluminum	✓	✓	✓	✓	✓		
Steel	✓	✓	✓	✓			
Stainless Steel	✓	✓	✓				

- Pressure-controlled setting allows installation of the same blind rivet nut in various material thickness without any adjustment of the tool.
- Ability to supply optimal force required for setting improves mandrel and overall tool life.
- Auto-reverse after setting increases production rate.
- Ensures fastener thread integrity by eliminating oversetting and double setting.
- Competitively priced, lightweight and easy to use tool increases the effectiveness of the blind rivet nut solution.